


## Single Point Load Cell

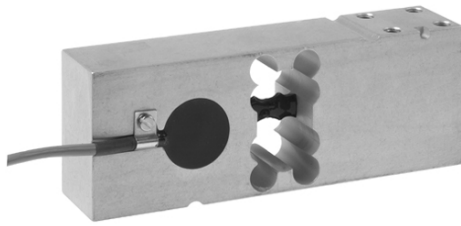

ATEX

### FEATURES

- Capacity range: 100 to 660kg
- Rigid, anodized aluminum construction
- OIML approved to C6 (150 - 660kg)
- Single point 800 x 800mm platform
- Minimal deflection and high natural frequency
- Sealed to IP66

### OPTIONAL FEATURES

- 2G EEx ia IIC T4 - ATEX hazardous area approval
- UNC threads

### DESCRIPTION

Model 1265 is an anodized aluminum single point load cell suitable for direct mounting with large platforms, check weighers, and a wide range of other applications.

A unique rigid design allows for low deflection and high natural frequency, making the 1265 suitable for dynamic applications such as Check Weighers.

This load cell supports large platforms up to 800 x 800mm. High accuracy (6000d) is maintained for overall characteristics (OIML R60) and for eccentric loading (OIML R76).


A humidity-resistant protective coating assures stable operation in damp environments over the entire compensated range and conforms to IP66 (IEC 60529).

The six-wire cable includes two sense wires that compensate for changes in lead resistance due to temperature changes and cable extension.

### APPLICATIONS

- Platform scales
- Bag fillers
- Check weighers
- Overhead track scales
- Process weighing

### OUTLINE DIMENSIONS in mm

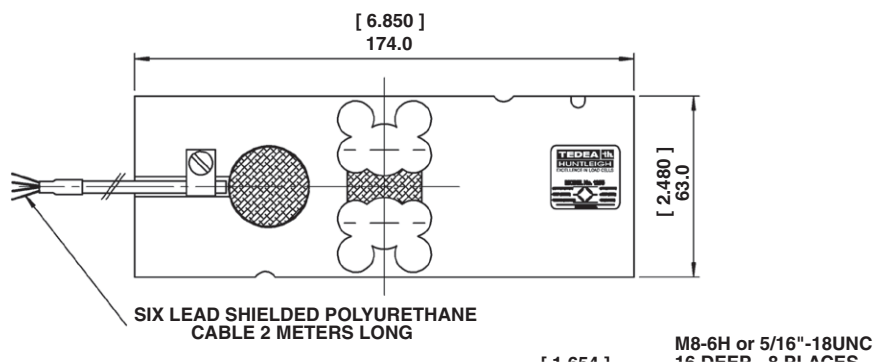


**SPECIFICATIONS**

PARAMETER	VALUE			UNIT
Rated capacity-R.C. ( $E_{max}$ )	100, 150, 200, 250, 300, 500, 600, 635, 660			kg
NTEP/OIML Accuracy class	Non-Approved	C3*	C6**	
Maximum no. of intervals (n)	1000	3000	6000	
$Y = E_{max}/V_{min}$	2000	15000	15000	Maximum available
Rated output-R.O.	2.0			mV/V
Rated output tolerance	0.2			±mV/V
Zero balance	0.2			±mV/V
Zero Return, 30 min.	0.0300	0.0170	0.0083	±% of applied load
Total Error	0.0500	0.0200	0.0100	±% of rated output
Temperature effect on zero	0.0100	0.0023	0.0024	±% of rated output/°C
Temperature effect on output	0.0030	0.0010	0.00058	±% of applied load/°C
Eccentric loading error	0.0070	0.0025	0.0012	±% of rated load/cm
Temperature range, compensated	-10 to +40			°C
Temperature range, safe	-30 to +70			°C
Maximum safe central overload	150			% of R.C.
Ultimate central overload	300			% of R.C.
Excitation, recommended	10			Vdc or Vac rms
Excitation, maximum	15			Vdc or Vac rms
Input impedance	415±15			Ohms
Output impedance	350±5			Ohms
Insulation resistance	>2000			Mega-Ohms
Cable length	2			m
Cable type	6 wire, PVC, single floating screen			Standard
Construction	Plated (anodized) aluminum			
Environmental protection	IP66			
Platform size (max)	800 x 800			mm
Recommended torque	Up to 300kg - 25.0 Above 300kg - 30.0			N*m

\* 50% utilization

\*\* 60% utilization, and for capacities 150kg and up

**Wiring Schematic Diagram**  
(Balanced bridge temperature compensation)



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.